

If you have any question about the installation, please call 8634097376

Continuous Ink Supply System For HP 02 cartridge model printer

Caution:

1. Never have the ink reservoirs higher or lower than the printer height. Ink tank MUST keep at the same table with printer all the time, and without anything under the ink tank.
2. Please print at least 1 time a week to keep the print head from dry out.

This set of the Continuous Ink Supply System comes with pre-filled Cartridges and Auto Reset Chips. You just need to fill the Reservoir bottles and print!


Installation Procedure:



Place the CIS on the right side of the printer. Open the top cover, take out the original cartridges.



Take off the air hole plug of the ink tank. Insert the air filter, the thicker side down.

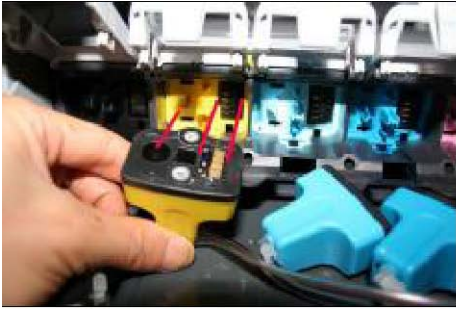

Please Install CIS cartridges from left to right. And make sure that each color cartridge installed in the correct position.



Attach the tube holder at the side of printer to hold the tube.

And it is ready to go.

WARNING:



- Keep out of reach of children



- Do not drink ink



- Avoid ink contact with eyes



- Store between 15-35°C

- Do not store in direct sunlight

- Once your CISS is installed

- NEVER raise it above your printer.

ENJOY!

www.**HOTZONE360**.com