

If you have any question about the installation, please call 8634097376

Continuous Ink Supply System

Caution:
Never have the ink reservoirs higher or lower than the printer height. They must keep at the same table all the time. If not, it will affect the ink flow to your printer and may cause your printer to flood with ink
To ensure ink does not fill the air chamber when refilling your unit, it is important that the air filter is replaced with the travel plug and that both the travel plug and refill plug are not removed at the same time



Put the CISS on the left side of the printer. In the meantime place all the tubes at correct Position.



Pull out the small rubber plug from the air hole as above Picture shown.




Place 4pcs of air filters into air holes, the thicker side is down into tank.


2) Second step: Set up the Continuous Ink Supply System



Open cover for Inkjet cartridges remove the original cartridges Insert our no-sponge cartridge into printer carefully

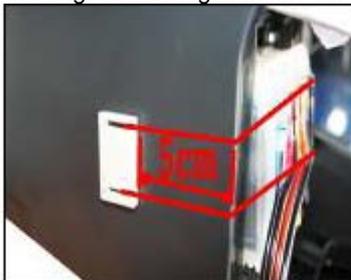

Slightly press every cartridge to check all the cartridges are in the correct position. Please be careful with the tubes which go out from Cartridge Carrier. Then stick the Support Arm on the position which shown in the third picture.

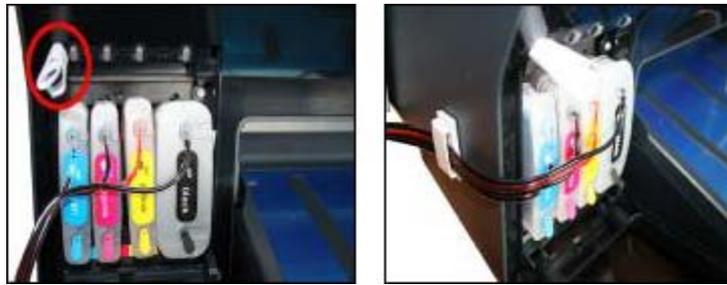

Use paper make taper style and Finished Insert the paper into the printer hole .Then cartridge-cover can be recognized cover well.

3) Third step: Checking the printing head



Enter in the Printer Services panel and print a Demo Page.

If there shows any breaks (maybe it caused by air bubbles in the printing head), please clean your printing head. If it is still shown little breaks, especially only for one color, it is unnecessary to repeatedly clean printer-head. Just keep the printer unuse for about one hour and print a Demo Page again. If it is still abnormal, please kindly contact us asap

4、 Reset Procedure:



If the indicator light flashing when printing, it tells that you need to reset the chip to full status. Please turn off your printer for about 30 seconds and switch it back on. Ink meter bar shall show full ink. You can start printing as usual.

5、 Refill Ink:



Please pay attention to the ink level in the reservoirs; if the ink level is below 1CM as the above picture shown, please use refill kits to fill ink into Reservoir bottles. Carefully pull out the rubber plugs from the refill holes.(there is possibility of ink spattering. Be careful!) Refill ink according to the color in short supply. Then put the rubber back. **(Please keep the printer and the reservoir at the same horizontal line during the process of refilling ink.)**

- 1 1. Please don't take out cartridge at random after installing the CIS system. Keep the reservoir bottles on the same level with the printer.
- 2 2. Try to keep at least 1/2 inch of ink in the bottles, as you don't want to run out of ink and draw air into the cartridge.
- 3 3. Don't place the Reservoir Bottles higher or lower much than the printer.

- 4 4. To be used in a dry place between 15 and 35 degree. Avoid exposure to direct sunlight.
- 5 5. Don't put the continuous ink supply systems reversed or leaning during the shipment. Please make sure all the ink filling holes and Ventilation holes are closed tightly during the transportation. Otherwise, the ink shall leak out.
- 6 6. Don't sway the cartridge frequently. It may cause ink leakage.
- 7 7. Don't pull out the connector of cartridge and don't tear off adhesive tape at the bottom of cartridge.

WARNING:



- Keep out of reach of children



- Do not drink ink



- Avoid ink contact with eyes



- Store between 15-35°C

- Do not store in direct sunlight

- Once your CISS is installed

NEVER raise it above your printer.

ENJOY!

PLEASE LEAVE GOOD FEEDBACK FOR US!

www.HOTZONE360.com