


IMPORTANT FIRST STEP!

PLEASE TAKE YOUR TIME WHILE DOING THIS!


CHIP REMOVAL AND INSTALLATION:

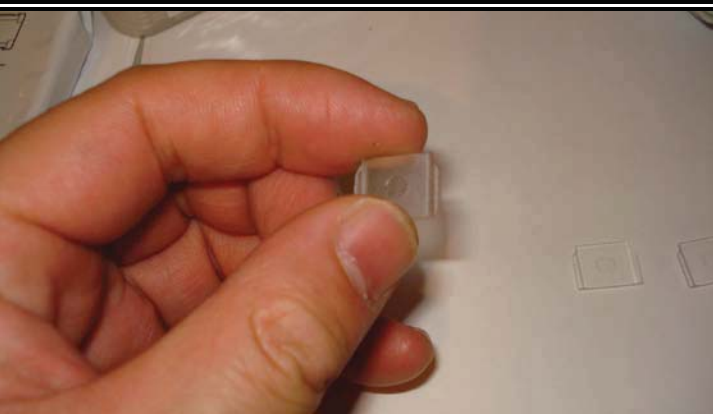


You should have 4 chips plastics part like the picture showed, it is for hold the chips from the OEM hp cartridge.



With a thin knife, gently slide the blade underneath the chip on the original cartridge and slowly, carefully, rock it back and forth until you have small gap between the chip and cartridge. Continue moving the blade to release any of the glue that is on the back of the chip until the chip releases from the cartridge.

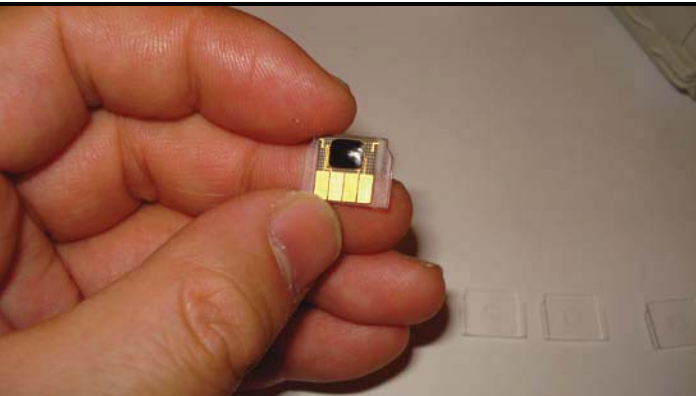

Attach the chips to the chips attachment part, which have 2 side, please attach the chip to the sunken side, please pay attention the position and the part position.

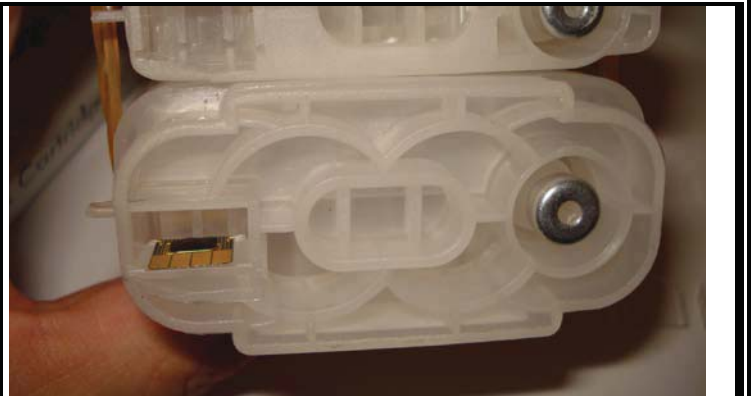

Attach the chip to the cartridge, do the same thing to the other 3 cartridges.

WE CANNOT EMPHASIZE ENOUGH TO TAKE YOUR TIME WITH THIS STEP!! PLEASE DO NOT SCRATCH THE TOP OF THE CHIP WITH BLADE!